




Profit from the Eagle Advantage®

# Specification Sheet

## Short Form Specifications

Eagle Cantilever Shelving System to consist of 14 gauge regular or NSF continuously seam-welded uprights, ceiling brackets, and single- or double-knob brackets. For use with either wire or solid shelving (sold separately). Uprights available in grey epoxy, stainless steel, or aluminum finish.

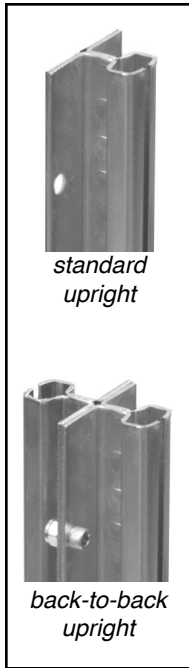

standard upright

back-to-back upright



wall-mounted cantilevered shelving shown with wire shelving

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

## Cantilevered Shelving System — Uprights

### MODELS:

- |                                    |                                      |
|------------------------------------|--------------------------------------|
| <input type="checkbox"/> MMU-*     | <input type="checkbox"/> MMBB*       |
| <input type="checkbox"/> MMNSU-*   | <input type="checkbox"/> MMNSBB*     |
| <input type="checkbox"/> MMUSS-*   | <input type="checkbox"/> MMBBSS*     |
| <input type="checkbox"/> MMNSUSS-* | <input type="checkbox"/> MMNSBBSS*   |
| <input type="checkbox"/> MMU/A-*   | <input type="checkbox"/> MMBB/FC/A-* |
| <input type="checkbox"/> MMNSU/A*  |                                      |

\* See charts on back page for complete model numbers.

- Designed with convenience in mind.
- Requires no post supports to get in the way, making shelf loading and unloading easier.
- For use with both wire and solid shelving.
- 100% usable shelving surface, from section to section, wall to wall, and front to back — no posts to restrict stock placement.
- Infinite height adjustability — no slots or keyholes to line up for leveling, and shimming is eliminated.
- Wall-mounted shelving requires no support from the floor — floor area is therefore open and easily maintained.
- Finishes available include grey epoxy, stainless steel, and aluminum.
- Regular and NSF-approved components available.
- All components are made of heavy gauge material.
- Heavy-duty, rugged construction.

See Spec Sheet #EG01.45B for Brackets.  
See Spec Sheet #EG01.45C for Heavy Duty Components.

**EAGLE GROUP**  
 100 Industrial Boulevard  
 Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 • 800-441-8440  
 Fax: 302-653-2065  
 www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.  
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com



EG01.45A Rev. 08/22

Spec sheets available for viewing, printing or downloading from our online literature library at [www.eaglegrp.com](http://www.eaglegrp.com)

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2022 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_


## Cantilevered Shelving System—Uprights\*



### STANDARD UPRIGHTS

For wall-mounted storage. 14 gauge. Continuously seam-welded. Rust and corrosion resistant. Available in grey epoxy, stainless steel, or aluminum finish. Regular or NSF-approved. Ceiling brackets (spec sheet #EG01.45B) required.

height in. mm	GREY EPOXY			STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
12" 305	MMU-1	MMNSU-1	1 0.5	MMUSS-1	MMNSUSS-1	1 0.5	MMU/A-1	MMNSU/A-1	1 0.5
24" 610	MMU-2	MMNSU-2	3 1.4	MMUSS-2	MMNSUSS-2	3 1.4	MMU/A-2	MMNSU/A-2	2 0.9
36" 914	MMU-3	MMNSU-3	4 1.8	MMUSS-3	MMNSUSS-3	4 1.8	MMU/A-3	MMNSU/A-3	2 0.9
48" 1219	MMU-4	MMNSU-4	6 2.7	MMUSS-4	MMNSUSS-4	5 2.3	MMU/A-4	MMNSU/A-4	3 1.4
60" 1524	MMU-5	MMNSU-5	7 3.2	MMUSS-5	MMNSUSS-5	7 3.2	MMU/A-5	MMNSU/A-5	4 1.8
72" 1829	MMU-6	MMNSU-6	9 4.1	MMUSS-6	MMNSUSS-6	8 3.6	MMU/A-6	MMNSU/A-6	4 1.8
84" 2134	MMU-7	MMNSU-7	10 4.5	MMUSS-7	MMNSUSS-7	9 4.1	MMU/A-7	MMNSU/A-7	5 2.3
96" 2438	MMU-8	MMNSU-8	11 5.0	MMUSS-8	MMNSUSS-8	11 5.0	MMU/A-8	MMNSU/A-8	6 2.7
108" 2743	MMU-9	MMNSU-9	13 5.8	MMUSS-9	MMNSUSS-9	12 5.4	MMU/A-9	MMNSU/A-9	7 3.2
120" 3048	MMU-10	MMNSU-10	14 6.4	MMUSS-10	MMNSUSS-10	13 5.8	MMU/A-10	MMNSU/A-10	7 3.2
144" 3658	MMU-12	MMNSU-12	17 7.7	MMUSS-12	MMNSUSS-12	16 7.3	MMU/A-12	MMNSU/A-12	9 4.1
156" 3962		n/a	20 9.0	n/a	n/a	-	MMU/A-14	MMNSU/A-14	10 4.5
168" 4267	MMU-16	n/a	23 10.4	n/a	n/a	-	MMU/A-16	MMNSU/A-16	12 5.4



### BACK-TO-BACK UPRIGHTS — FLOOR-TO-CEILING

For center room storage. Attaches to floor and ceiling. Two uprights are bolted or welded back-to-back. Available in grey epoxy, stainless steel, or aluminum finish. Regular or NSF-approved. Must be used with foot brackets and ceiling brackets.

height in. mm	GREY EPOXY			STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	weight lb. kg	
48" 1219	MMBB/FC-4	MMNSBB/FC-4	11 5.0	MMBBSS/FC-4	MMNSBBSS/FC-4	11 5.0	MMBB/FC/A-4	11 5.0	
60" 1524	MMBB/FC-5	MMNSBB/FC-5	14 6.4	MMBBSS/FC-5	MMNSBBSS/FC-5	24 10.9	MMBB/FC/A-5	14 6.4	
72" 1829	MMBB/FC-6	MMNSBB/FC-6	17 7.7	MMBBSS/FC-6	MMNSBBSS/FC-6	28 12.7	MMBB/FC/A-6	17 7.7	
84" 2134	MMBB/FC-7	MMNSBB/FC-7	20 9.0	MMBBSS/FC-7	MMNSBBSS/FC-7	33 15.0	MMBB/FC/A-7	20 9.0	
96" 2438	MMBB/FC-8	MMNSBB/FC-8	23 10.4	MMBBSS/FC-8	MMNSBBSS/FC-8	38 17.2	MMBB/FC/A-8	23 10.4	
108" 2743	MMBB/FC-9	MMNSBB/FC-9	26 11.8	MMBBSS/FC-9	MMNSBBSS/FC-9	42 19.1	MMBB/FC/A-9	26 11.8	
120" 3048	MMBB/FC-10	MMNSBB/FC-10	29 13.2	MMBBSS/FC-10	MMNSBBSS/FC-10	47 21.3	MMBB/FC/A-10	29 13.2	
144" 3658	MMBB/FC-12	MMNSBB/FC-12	34 15.4	MMBBSS/FC-12	MMNSBBSS/FC-12	57 25.9	MMBB/FC/A-12	34 15.4	

\* See Spec Sheet #EG01.45C for Heavy Duty Uprights.

#### EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065  
 www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.  
 ©2022 by Eagle Group

Rev. 08/22

Spec sheets available for viewing, printing or downloading from our online literature library at [www.eaglegrp.com](http://www.eaglegrp.com)

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.