



Profit from the Eagle Advantage®

# Specification Sheet

## Short Form Specifications

Eagle Hot Food Tables, Spec-Master® series, model \_\_\_\_\_ enclosed base design. Top and body are heavy gauge type 430 stainless steel (Open Front or Sliding Doors). Beaded top openings are 12½" x 20½". Heating compartments are 8" deep, galvanized, and insulated on all four sides and bottom with 1" fiberglass or equal. Recessed control panel with individual thermostatic controls. Each compartment fitted with 750-watt tubular heating element above the insulated bottom. 6' cord and plug. Complete unit wired to master toggle switch with indicator light. Furnished with polyethylene cutting board. Includes 5"-diameter swivel plate casters (two with brake).



unit with open front

These hot food tables are designed to be operated dry. If wet operation is required, spillage pan (#302027) must be used.

## Options / Accessories

- Hardwood cutting boards
- 1000-watt heater\*
- Spillage pans (for wet operation)
- Rolltop cover
- Food pans/insets
- Tray slides/shelves
- Top adapters
- Serving shelves
- Decorative laminates
- Spec-Master® Marine edge

\* For 208V and 240V models only. To order, add suffix "-1". Example: PHT30B-120-1

## EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065  
www.eaglegrp.com  
www.eaglegrpnews.com  
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.  
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: \_\_\_\_\_  
Project No.: \_\_\_\_\_  
S.I.S. No.: \_\_\_\_\_

# Spec-Master® Electric Hot Food Tables—Enclosed Base, Portable

## MODELS:

- PHT2CB-120
- PHT2CB-240\*
- PHT2OB-120
- PHT2OB-240\*
- PHT3CB-120
- PHT3CB-240\*
- PHT3OB-120
- PHT3OB-240\*
- PHT4CB-120
- PHT4CB-240\*
- PHT4OB-120
- PHT4OB-240\*
- PHT5CB-240\*
- PHT5OB-240\*
- PHT6CB-240\*
- PHT6OB-240\*

\* Available in 208-volt and three-phase. See chart on back page.

## Construction

- Table body and top constructed of highly polished heavy gauge 430 series stainless steel.
- Top has die-stamped beaded openings measuring 12½" x 20½" (307 x 510mm).
- A poly cutting board 8" wide x ½" (203 x 13mm) thick is mounted on drop brackets located on control side of unit.
- 5" (127mm) diameter NSF-approved ball bearing swivel casters (two with brake).
- Push bar attached to end panel at operator's right.
- Full perimeter bumper guards.

## Controls

- Individual thermostatic controls offer a wide range of temperature settings.
- Indicator light remain on continuously while control is on.

## Heat Compartments

- Each heat compartment is 8" (203mm) deep and lined with 22 gauge galvanized steel.
- Each compartment is insulated on all four sides and bottom with 1" (25mm) thick fiberglass or equal.

## Electrical

- Each compartment is fitted with a 750-watt tubular element above the insulated bottom.
- 6' cord with plug extends from the righthand control side as standard equipment.
- Complete unit is wired to a master toggle switch with indicator light.
- 120-volt units are single phase. 208- and 240-volt units available in single- and three-phase.

## Sliding Doors (when indicated)

- 22 gauge stainless steel construction complete with recessed stainless steel handle.
- Doors sit within an exclusive rollerless track assembly, providing easier cleaning and lower maintenance.

## Certifications / Approvals



New York MEA 376-84-E



AutoQuotes



EG30.05 Rev. 10/22

Spec sheets available for viewing, printing or downloading from our online literature library at our websites


Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2022 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_

# Spec-Master® Electric Hot Food Tables—Enclosed Base, Portable

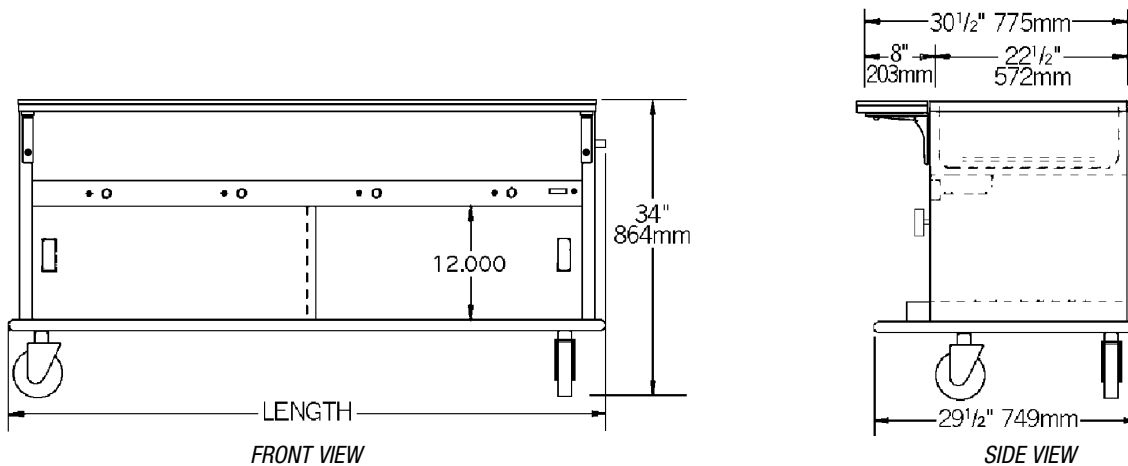

(note: unit with sliding doors shown)

| SINGLE-PHASE            |                            |       |           | THREE-PHASE *           |                            |       |           | # of top openings | electrical data | length  |      | weight |       |
|-------------------------|----------------------------|-------|-----------|-------------------------|----------------------------|-------|-----------|-------------------|-----------------|---------|------|--------|-------|
| WITH OPEN FRONT model # | WITH SLIDING DOORS model # | amps  | NEMA plug | WITH OPEN FRONT model # | WITH SLIDING DOORS model # | amps  | NEMA plug |                   |                 | in.     | mm   | lbs.   | kg    |
| PHT2OB-120              | PHT2CB-120                 | 12.5A | 5-15P     | n/a                     | n/a                        | -     | -         | 2                 | 1500W, 120V     | 35 3/4" | 908  | 200    | 90.7  |
| PHT2OB-208              | PHT2CB-208                 | 7.2A  | 6-15P     | PHT2OB-208-3            | PHT2CB-208-3               | 6.3A  | 15-20P    | 2                 | 1500W, 208V     | 35 3/4" | 908  | 200    | 90.7  |
| PHT2OB-240              | PHT2CB-240                 | 6.3A  | 6-15P     | PHT2OB-240-3            | PHT2CB-240-3               | 5.4A  | 15-20P    | 2                 | 1500W, 240V     | 35 3/4" | 908  | 200    | 90.7  |
| PHT3OB-120              | PHT3CB-120                 | 18.8A | 5-30P     | n/a                     | n/a                        | -     | -         | 3                 | 2250W, 120V     | 50 3/4" | 1289 | 268    | 121.6 |
| PHT3OB-208              | PHT3CB-208                 | 10.8A | 6-15P     | PHT3OB-208-3            | PHT3CB-208-3               | 6.3A  | 15-20P    | 3                 | 2250W, 208V     | 50 3/4" | 1289 | 268    | 121.6 |
| PHT3OB-240              | PHT3CB-240                 | 9.4A  | 6-15P     | PHT3OB-240-3            | PHT3CB-240-3               | 5.4A  | 15-20P    | 3                 | 2250W, 240V     | 50 3/4" | 1289 | 268    | 121.6 |
| PHT4OB-120              | PHT4CB-120                 | 25.0A | 5-50P     | n/a                     | n/a                        | -     | -         | 4                 | 3000W, 120V     | 66 1/4" | 1683 | 332    | 150.6 |
| PHT4OB-208              | PHT4CB-208                 | 14.4A | 6-20P     | PHT4OB-208-3            | PHT4CB-208-3               | 9.5A  | 15-20P    | 4                 | 3000W, 208V     | 66 1/4" | 1683 | 332    | 150.6 |
| PHT4OB-240              | PHT4CB-240                 | 12.5A | 6-20P     | PHT4OB-240-3            | PHT4CB-240-3               | 8.3A  | 15-20P    | 4                 | 3000W, 240V     | 66 1/4" | 1683 | 332    | 150.6 |
| PHT5OB-208*             | PHT5CB-208*                | 18.0A | 6-30P     | PHT5OB-208-3            | PHT5CB-208-3               | 12.5A | 15-20P    | 5                 | 3750W, 208V     | 81 3/4" | 2076 | 383    | 173.7 |
| PHT5OB-240*             | PHT5CB-240*                | 15.6A | 6-20P     | PHT5OB-240-3            | PHT5CB-240-3               | 10.8A | 15-20P    | 5                 | 3750W, 240V     | 81 3/4" | 2076 | 383    | 173.7 |
| PHT6OB-208*             | PHT6CB-208*                | 21.6A | 6-30P     | PHT6OB-208-3            | PHT6CB-208-3               | 12.5A | 15-20P    | 6                 | 4500W, 208V     | 97 3/4" | 2470 | 438    | 198.7 |
| PHT6OB-240*             | PHT6CB-240*                | 18.0A | 6-30P     | PHT6OB-240-3            | PHT6CB-240-3               | 10.8A | 15-20P    | 6                 | 4500W, 240V     | 97 3/4" | 2470 | 438    | 198.7 |

\* All Three-Phase units, and Single-Phase 5- and 6-well units, available in 208V and 240V only.

### Receptacle Configurations Required

See above chart for applicable NEMA plug.

|                               |                               |                               |                               |                               |                                |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
|                               |                               |                               |                               |                               |                                |
| 15A 120V                      | 15A 240V                      | 20A 240V                      | 30A 240V                      | 50A 120V                      | 20A 3Ø 240V                    |
| furnished with NEMA 5-15 plug | furnished with NEMA 6-15 plug | furnished with NEMA 6-20 plug | furnished with NEMA 6-30 plug | furnished with NEMA 5-50 plug | furnished with NEMA 15-20 plug |

### FLEX-MASTER® Overshelf Kits

Both kits include two 16/304 overshelves and four 30" (762mm) posts. Add suffix specified to order kit (example: PHT2OB-120-FMU), or design your own using standard components from EG30.18.

| description                                  | add suffix |
|--|------------|
| 10" (254mm) overshelves                      | -FM        |
| 15" (381mm) overshelves, plus one ladle rack | -FMU       |

### EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglegrpnews.com • www.eaglegrp.com

Printed in U.S.A.  
 ©2022 by Eagle Group

Rev. 10/22

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.